

# ENDURO-FLEX STAINLESS™

Consistent finish without discoloration



**WALTER**

Achieve Greatness™

# ENDURO-FLEX STAINLESS™

When working on stainless steel ENDURO-FLEX Stainless™ flap discs will provide exceptional cost savings, higher productivity and a more consistent surface finish without discoloration. The construction of the disc results in lower heat generation to achieve the best surface finish in the least amount of time eliminating rework. It is guaranteed not to contaminate steel thanks to a formula free of iron, sulfur and chlorine.



Dia.	Arbor	Grade	Order No.	Max. RPM	Std. Pkg.	Std. Ctn.
4 1/2"	5/8"-11	40	06-F 454	13,300	10	40
4 1/2"	5/8"-11	60	06-F 456	13,300	10	40
4 1/2"	5/8"-11	80	06-F 458	13,300	10	40
4 1/2"	5/8"-11	120	06-F 462	13,300	10	40
5"	5/8"-11	40	06-F 504	12,200	10	40
5"	5/8"-11	60	06-F 506	12,200	10	40
5"	5/8"-11	80	06-F 508	12,200	10	40
5"	5/8"-11	120	06-F 512	12,200	10	40
6"	5/8"-11	40	06-F 604	10,200	10	40
6"	5/8"-11	60	06-F 606	10,200	10	40
6"	5/8"-11	80	06-F 608	10,200	10	40
6"	5/8"-11	120	06-F 612	10,200	10	40

Always use with flange 30-B 057.



Dia.	Arbor	Grade	Order No.	Max. RPM	Std. Pkg.	Std. Ctn.
4 1/2"	7/8"	40	15-Q 454	13,300	10	40
4 1/2"	7/8"	60	15-Q 456	13,300	10	40
4 1/2"	7/8"	80	15-Q 458	13,300	10	40
4 1/2"	7/8"	120	15-Q 462	13,300	10	40
5"	7/8"	40	15-Q 504	12,200	10	40
5"	7/8"	60	15-Q 506	12,200	10	40
5"	7/8"	80	15-Q 508	12,200	10	40
5"	7/8"	120	15-Q 512	12,200	10	40
7"	7/8"	40	15-Q 704	8,600	10	40
7"	7/8"	60	15-Q 706	8,600	10	40
7"	7/8"	80	15-Q 708	8,600	10	40
7"	7/8"	120	15-Q 712	8,600	10	40

Always use with flange 30-B 057.


## FOR MORE INFORMATION, TO SCHEDULE A FREE DEMO OR TO ORDER:

### United States:

Phone: (800) 522-0321 | Fax (866) 274-4435  
Email: OrderDesk.US@walter.com

### Canada:

Phone: (888) 592-5837 | Fax (866) 581-1121  
Email: csr@walter.com

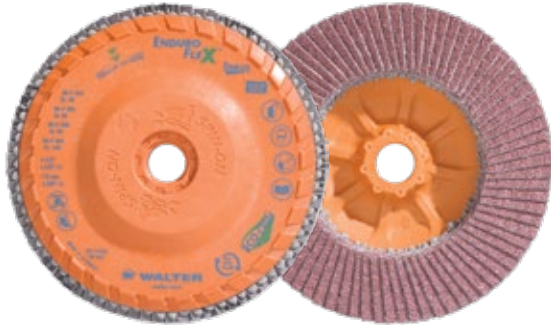

- ▷ Superior performance on all heat sensitive metals
- ▷ Will not load or glaze
- ▷ The coolest cutting action on stainless
- ▷ Reduced discoloration and distortion
- ▷ Trimmable ECO-TRIM™ backing

**PRO TIP:** Extend flap disc life up to 3X: when the flap overhang wears down, trim away 1/2" of the backing at a time to expose fresh abrasive grain.

Available at :

Walter Surface Technologies Inc. © 2022 All Rights Reserved. Walter Surface Technologies and Bio-Circle logos are trademarks or registered trademarks of Walter Surface Technologies Inc. Other company, product or service names may be trademarks or service marks of Walter Surface Technologies or others. 98-E 102 (09-22)